


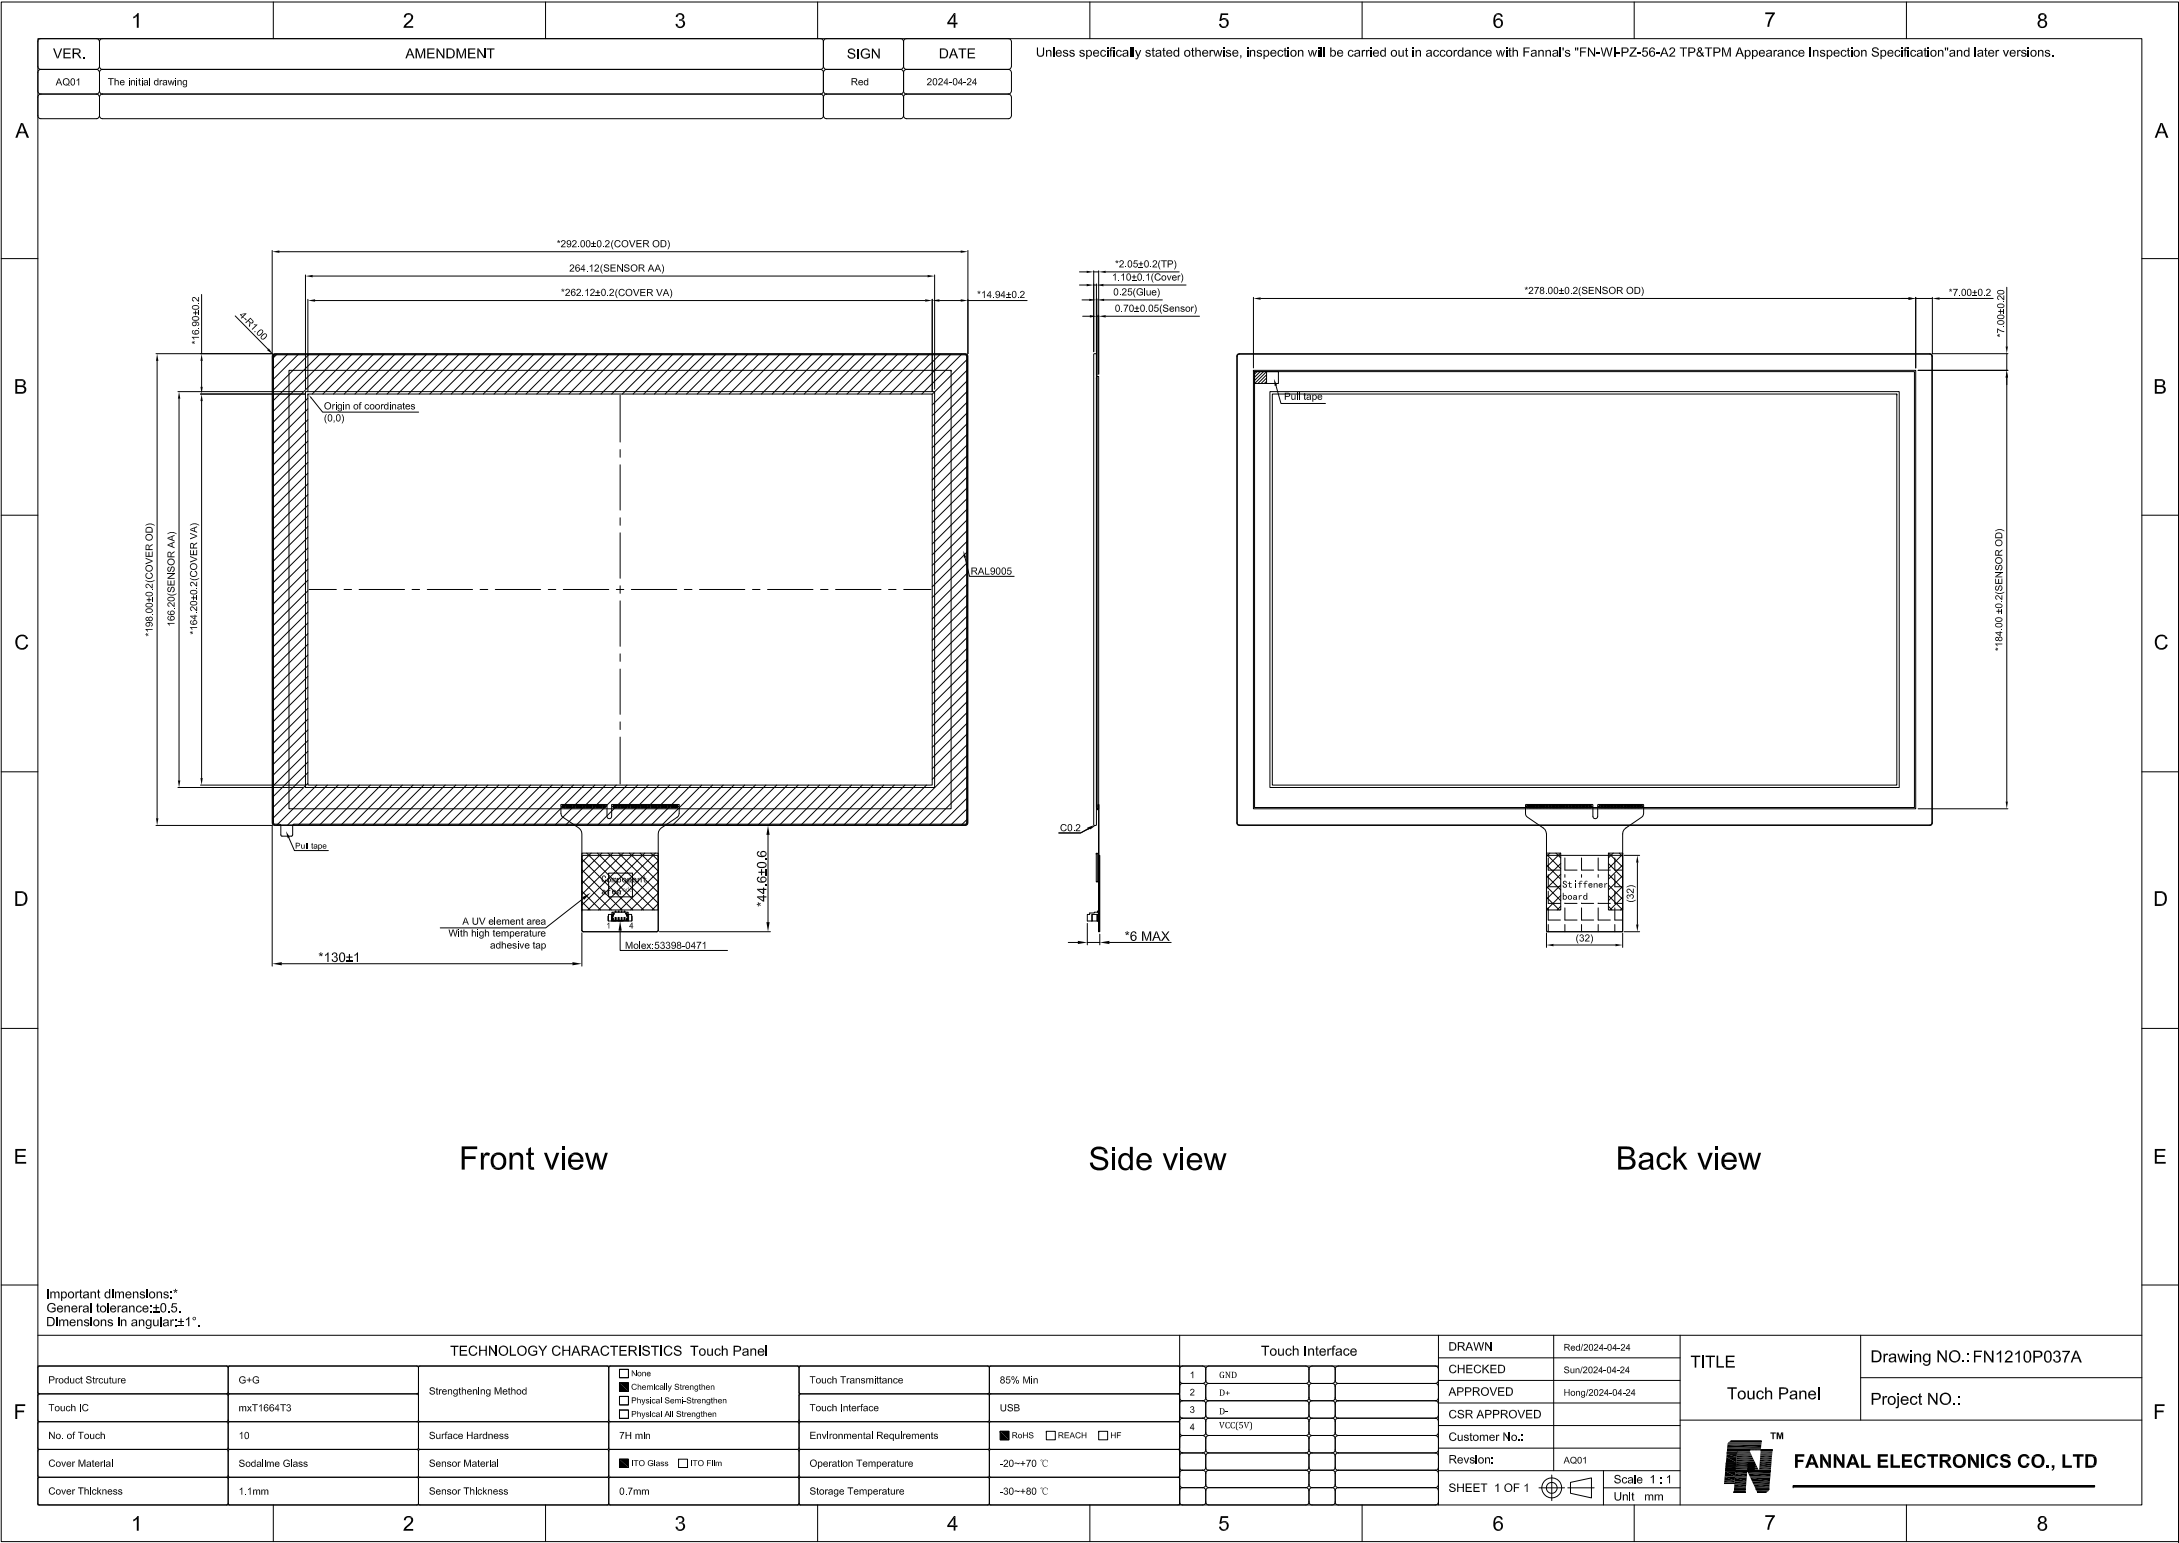

Unless specifically stated otherwise, inspection will be carried out in accordance with Fannal's "FN-WPZ-56-A2 TP&TPM Appearance Inspection Specification" and later versions.

Front view

Side view

Back view

Important dimensions: *
General tolerance: ±0.5,
Dimensions in angular: ±1°.

TECHNOLOGY CHARACTERISTICS Touch Panel						Touch Interface		DRAWN	Red/2024-04-24	TITLE	Drawing NO.: FN1210P037A
Product Structure	G+G	Strengthening Method	☐ None ☒ Chemically Strengthen ☐ Physical Semi-Strengthen ☐ Physical All Strengthen	Touch Transmittance	85% Min	1	GND	CHECKED	Sun/2024-04-24		Project NO.:
Touch IC	mxT1664T3			Touch Interface	USB	2	D+	APPROVED	Hong/2024-04-24	Customer No.:	
No. of Touch	10	Surface Hardness	7H min	Environmental Requirements	☒ RoHS ☐ REACH ☐ HF	3	D-	CSR APPROVED			
Cover Material	Sodalime Glass	Sensor Material	☒ ITO Glass ☐ ITO Film	Operation Temperature	-20→+70 °C	4	VCC(5V)	Revision:	AQ01	FANNAL ELECTRONICS CO., LTD	
Cover Thickness	1.1mm	Sensor Thickness	0.7mm	Storage Temperature	-30→+80 °C			SHEET 1 OF 1	Scale 1:1 Unit mm		